

product specifications for:

Connector

Item #: 5269CR

Description

Connector, straight blade, corrosion-resistant

Electrical Specifications

15 amperes, 125 volts, NEMA Configuration 5-15R

Material Specifications

Housing and plug body are nylon with CTI greater than 600 volts. Contacts are solid brass.

Terminals

Tempered brass, lug style, Perma-Lock™ design. Terminals visible through clear end cap.

Terminal Identification

Terminal screws are color coded. Ground wire entrance hot stamped green and marked "GR."
Line wire entrance hot stamped black.


Cord Clamp: Internal. Accommodates 18/3 SJ through 12/3 S cable.

Overall Design: Two assembly screws, U-drive style. All screws are combination slot/cross head, stainless steel. Beveled housing, yellow. Dust seal at cord entry.
Cable strip length gauge molded into connector body.

Listings: UL listed, File E57672
CSA certified, File LR81290



Dimensions:

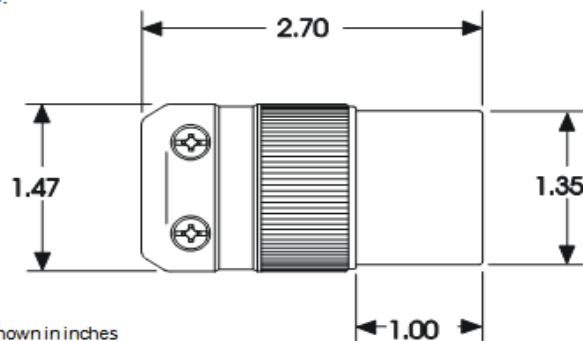

Dimensions shown in inches

toll free 800.307.6702 | marincopowerproducts.com

©2015 Maringo Power Products. All rights reserved.

MARINCO
power products