

SeaLink<sup>®</sup> Dual USB Charger & Receptacle

Marinco Power Products introduces the Dual USB charger, and combination Dual USB with 12V Receptacle. An expansion of the durable SeaLink 12V product line, the combination Dual USB features two ports to charge cell phones, tablets and other devices powered by USB's, a blue LED to show that power is available, and a cover to prevent water and dirt from entering the ports. The Dual USB has a 12 to 24 Volt input with a 5 Volt output, a total of 2.1 amps output between the two ports. The 12V receptacle included in the combination SeaLink USB charger, is rated to 20 amps, and is compatible with 12V plugs. A no LED version is also available and allows only 3.2 mA's compared to the 10 mA versions with the LED. These products are ideal for your USB charging needs and designed for longevity in harsh environments.

Dual USB ports with 2.1 Amps total output


Blue LED shows power is available


Covers prevent dust and water from damaging the products




## Specifications

12VCOMBO 12VCOMBO-B 12VCOMBON-B 12VCOMBOW-B

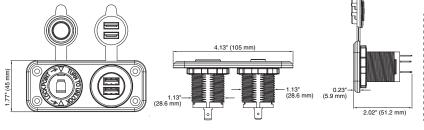



	Dual USA Charger & 12V Receptacle						
Part #	12VCOMBO	12VCOMBO-B	12VCOMBOW-B	12VCOMBON-B			
Color	black	black	white	black			
Amps	2.1	2.1	2.1	2.1			
DC Voltage Input	12	12	12	12			
LED Power Indicator	yes	yes	yes	no			
Insulated Terminal Included	Yes	no	yes	yes			

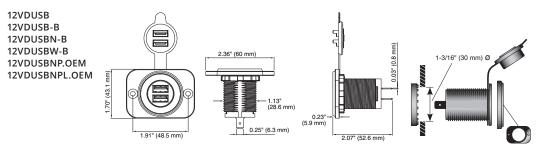

	Dual USB Charger Receptacle							
Part #	12VDUSB	12VDUSB-B	12VDUSBW-B	12VDUSBN-B	12VDUSBNP.OEM	12VDUSBNPL.OEM		
Color	black	black	white	black	black	black		
Amps	2.1	2.1	2.1	2.1	2.1	2.1		
DC Voltage Input	12-24	12-24	12	12	12	12		
DC Voltage Output	5	5	5	5	5	5		
LED Power Indicator	yes	yes	yes	no	yes	no		
Insulated Terminal Included	yes	no	yes	yes	yes	yes		
Mounting Plate Included	yes	yes	yes	yes	no	no		



